

☐ PAIR Swing Out

☐ PAIR Double Acting

Standard 250, 400, and 550 Door and Frame Quote/Order Request Form

Fax completed checklist to U.S. Aluminum Technical Sales at (877) 883-7547. Then please call to review at (800) 627-6440. This form is also available at **usalum.com**.

									Page 1 of 3	
COMPANY NAI	ME						PHONE			
COMPANY NAME ACC										
JOB NAME							EWAIL			
QUOTE 🔲	ORDER P.O. #			DATE						
	_						ST	ANDARD PROFILE D	DIMENSIONS	
		SERIES		THICKN	ESS		STILE	TOP RAIL	BOTTOM RAIL	
		250 NARRO	W STILE	1-3/4"			2"	2-1/8"	3-3/16"	
		400 MEDIUN		1-3/4"			3-1/2"	3-3/16"	6-1/2"	
		550 WIDE S	TILE	1-3/4"			5"	5-1/2"	6-1/2"	
DOOR STILE	TOP RAIL				BOTTOM RAIL			GLASS STOP		
☐ 250 Narrow	☐ Standard		□ 6-1/2"		□ Standard	□ 7-1/2"		☐ With 1/4" So	quare Glass Stops	
☐ 400 Medium	□ 3-3/16" - Mi				3 -3/16"	□ 9-1/2"			evel Glass Stops	
☐ 550 Wide	□ 5-1/2" - No (OHCC	☐ Custom		□ 5-1/2"	☐ Custom		☐ With 1" Gla	•	
					□ 6-1/2"			Other		
CLEARANCES/ THR	ESHOLDS		DOC	R OPENING SIZ	E		HARDW	ARE FINISH	DOOR FINISH	
	ottom of Door to F	inish Floor		6" x 84"			• Clea		11, 52, 71	
□ Custom Specify			_ 🗆 C	custom Single_			• Bron		22	
Thresholds	Cantan I luna Daa		D	Door Tag #				cify		
□ 4" Standard for□ 4-3/4" Standard	_		 7	2" x 84"						
☐ Custom Specify	_		0	Custom Pair						
☐ By USALUM			D				DOOR C	LOSER		
	Requires Manufa	cturer's Nam	ne,	· -					e Acting-Prep Only)	
Model, and Templ	late er:		DOC	DOOR FINISH			☐ Standard Jackson Closer (Supply)			
Model:	···		□ 1	☐ 11 - Clear Anodized Class I				☐ O.H. Concealed (Offset-Prep Only)		
			2	2 - Dark Bronz	ze / Black Anodiz	ed Class I		ndard Jackson Clos		
DOOR HINGING			□ 5	☐ 52 - Bone White 70% KYNAR® (2-Coat)					pen □ Yes □ No	
☐ Continuous Geared Hinge☐ 1 Pair Butt Hinges☐ 2 Description			□ 7	☐ 71 - Standard 70% Kynar® (2-Coat)				☐ Floor Closer (Double Acting-Prep Only)		
☐ I Pair Butt Hinges ☐ Intermediate Butt Hinges for Doors Over 84"				Standard Color per Chart- Specify			☐ Standard Jackson Floor Closer (Supply)			
Add per Door								Closer (Offset-Pre		
☐ Top/Bottom Offset Pivots			□ 7	☐ 71 - Custom 70% KYNAR [®] (2-Coat) - Specify			□ Stan	dard Jackson Floo	Closer (Supply)	
☐ Standard DH010 Intermediate Pivots For Doors Over 84"				·				Surface Mount Clo		
Add per Door			□ 7	☐ 71 - Custom 70%KYNAR [®] (3-Coat) - Specify			☐ Drop		(11 37	
□ Power Transfer							☐ Coor			
☐ Center Pivot (D	٠,	0 1					_ □ Cond	ealed Top Rail Doo	r Stop/Holder Degree	
□ Custom □ By USALUM □ By Customer □ Prep and Install □ Prep and Supply				*MID-PANEL (MUNTIN)				uires Special Top Rail		
☐ Prep and Install ☐ Prep and Supply ☐ Prep Only ☐ Blank (No Prep)				□ 5/8" □ 4-1/8" □ 6-3/16" □ 7-1/2"						
NOTE: Prep Only Requires Manufacturer's Name,			ııc,	□ 2" □ 5" □ 6-1/2" □ 9-1/2"				loser Required		
Model, and Template				☐ Other			□ Custom □ By USALUM □ By Customer			
Manufacturer: Model:			* [* Dimensions do not include stops.			☐ Prep and Install ☐ Prep and Supply			
			0.TV				☐ Prep		-1	
DOOR SWING QTY				DOOR SWING CHART				-	es Manufacturer's	
□ LHR Hinge Left Swing Out ea □ RHR Hinge Right Swing Out ea				INTERIOR			Name,	Model, and Temp	late	
☐ LH Hinge Left Swing In ea				6 5 LH RH 2 1					· · · · · · · · · · · · · · · · · · ·	
☐ RH Hinge Right Swing In ea				LH RH 2 1 1 RHD RHD LHR RHR			Mc	del:		
☐ LHD Hinge Left Double Acting ea								OFFICE USE ONLY		
□ RHD Hinge Right Double Acting ea				E X T	E R I	O R	TAK	EN BY:		
□ PAIR Swing In ea			ea	Use the Door Swing Chart to determine			DDICED BY:			

PRICED BY:

EDITED BY:

ea

ea

how the door(s) should be handed.



Standard 250, 400, and 550 Door and Frame Quote/Order Request Form

Fax completed checklist to U.S. Aluminum Technical Sales at (877) 883-7547. Then please call to review at (800) 627-6440. This form is also available at **usalum.com**.

Page 2 of 3

LOCKING OPTIONS				PUSH/PULL HARDWARE
☐ MS Hookbolt With Two Cylinders - S	STD • DH569 Lever Han	ndle		☐ Standard Push Bars
☐ Long Throw Deadlock With Cylinde		☐ Back to Back		☐ Standard Push/Pull
☐ 3-Point Locking @ Pair With Cylind	ers • CRL DL2150 Leve	er Handle		☐ Offset Pulls
☐ Latch/Deadlock (DH189) With Cylin	nders	■ Back to Back		□ None
☐ Thumbturn in Lieu of Cylinder	□ Electric Strike			☐ Custom ☐ By USALUM ☐ By Customer
☐ Latchlock (DH002)	Custom	☐ By USALUM	□ By Customer	☐ Prep and Install ☐ Prep and Supply
□ Cylinder (Ext.) □ Thumbturn (Int	t.) Prep and Install	☐ Prep and Supply	-	☐ Prep Only
□ Lock Indicator	☐ Prep Only	☐ Blank (No Prep)		NOTE: Prep Only Requires Manufacturer's
☐ Cylinder Guard	NOTE: Prep Only F	Requires Manufacturer	r's Name	Name, Model, and Template
□ Flushbolts	Model, and Templa			Manufacturer:
☐ Paddle Handle	Manufacturer:			Model:
□ Lockset				PANIC DEVICES
				Concealed Vertical Rod Panics
FRAME SYSTEM				☐ Jackson 1285
Series 400 1-3/4" x 4"	□ Tubular	Open Back		☐ Jackson 2086
Series 450 1-3/4" x 4-1/2"	□ Tubular	Open Back		☐ Jackson 1085
Series 451 2" x 4-1/2"	□ Tubular	Open Back		☐ Adams Rite 8600
Flush Front 4-1/2"	☐ FF450	☐ FF451		☐ With Cylinder on Active Leaf
Flush Front 6"	☐ FF600.	☐ FF601		•
Subframe	☐ 1" x 4-1/2"	☐ 1" x 4"		☐ Exit Only
☐ Custom: Specify		·····		☐ With Cylinders on Pair (Both Leaf's)
FRAME TYPE	DOOR SWE	EP		B. B.
☐ Up and Over (No Transom)	□ Yes	⊒ No		Rim Panics
☐ 126" (3.2 m) High With Transom	□ Exposed	d Fasteners 🚨 Conc	ealed Fasteners	☐ Jackson 1295
☐ Frame Only	CONCEALE			☐ Jackson 2095
☐ Door Only (No Frame)	☐ Top Rail			☐ Jackson 1095
□ Custom	□ Bottom			☐ Adams Rite 8800
	2 Bottom	ran		With Cylinder on Active Leaf
				☐ Exit Only
JACKSON 1285 A LOCATION JA	ACKSON 1295 A LOCATION	PUSH / P	ULL	Removable Mullion (For Pair of Doors)
CONCEALED VERTICAL	RIM PANIC			With Cylinders on Pair (Both Leaf's)
ROD PANIC		& CYLIND	DER	
	11 11	11	11	Mortise Panics
				☐ Adams-Rite 8400
				□ With Cylinder □ Exit Only
و <u> </u>	€ \\ \ \ \\ \e	<u> </u>	<u>E</u>	☐ CRL-Blumcraft Panic
↑ - 		∳	= @	☐ Custom ☐ By USALUM ☐ By Customer
	- - - - - - - - -	─ - ♦ -	+	☐ Prep and Install ☐ Prep and Supply
		- -1-1/8"		☐ Prep Only
_		Backse	et	NOTE: Prep Only Requires Manufacturer's
		2"34"		Name, Model, and Template
i		.34 -34		Manufacturer:
				Model:
<u> </u>				FOR OFFICE USE ONLY
А В	A B	٨	В	TAKEN BY:
•	A B ndard Location	A Standard	Location	
	ation or Specify	Location	or Specify	PRICED BY:
, ,	1 7		, ,	EDITED BY:
D I COATION OVE BANKS			COATION DIVINOPULA	
B LOCATION CVR PANIC	Contagline of Box from Bottom of		LOCATION RIM/MORTISE	
	Centerline of Bar from Bottom of L 35-7/8" to CL of Crash Bar		odel ckson 1095 Rim	Centerline of Bar from Bottom of Door 35-7/8" to CL of Crash Bar
	38-5/32"		ckson 2095 Rim	38-5/32"
Jackson 3185 Midpanel CVR 3	38-5/32"		lams Rite 8800 Rim	39"
Jackson 3186 Midnanel CVR 3	88-5/32"	Δα	lams Rite 8400 Mortis	30"

DATE __

39"

8600 CVR


APPROVED BY_




Standard 250, 400, and 550 Door and Frame Quote/Order Request Form

Fax completed checklist to U.S. Aluminum Technical Sales at (877) 883-7547. Then please call to review at (800) 627-6440. This form is also available at **usalum.com**.

Page 3 of 3

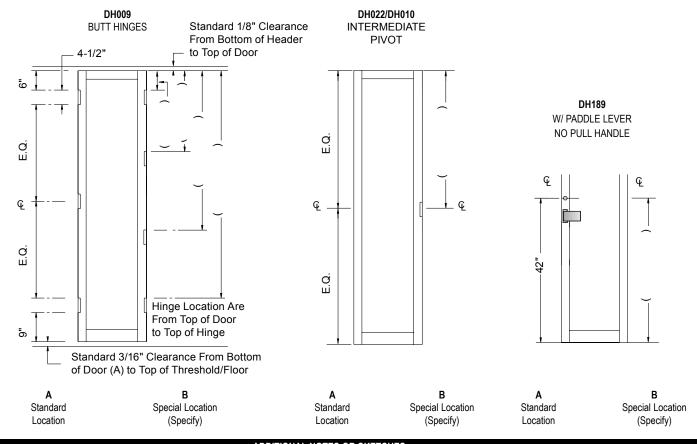

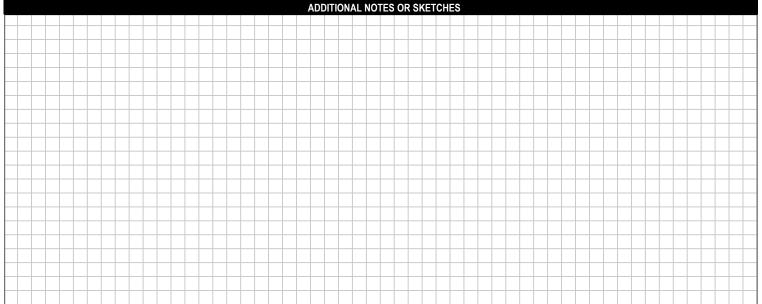

		FOR OFFICE USE ONLY
		TAKEN BY:
DDDOVED DV	DATE	PRICED BY:
PPROVED BY	DATE	EDITED BY: