


# CRL BOTTOM HYDRAULIC PATCH FITTINGS




*Adjustable Closing and Latching Speeds*

- Self-Closing Fittings for 3/8" or 1/2" (10 or 12 mm) Monolithic Tempered Glass
- Hold-Open and No Hold-Open Models Available for Interior Use Only
- Adjustable Closing and Latching Speeds
- 2-9/16" (65 mm) European Pivot Setback must be used with European PH21A Patch
- Brushed and Polished Stainless Steel Cover Plates
- Max Door Weight 220 pounds (100 kg)
- Max Door Width 39" (1 meter)

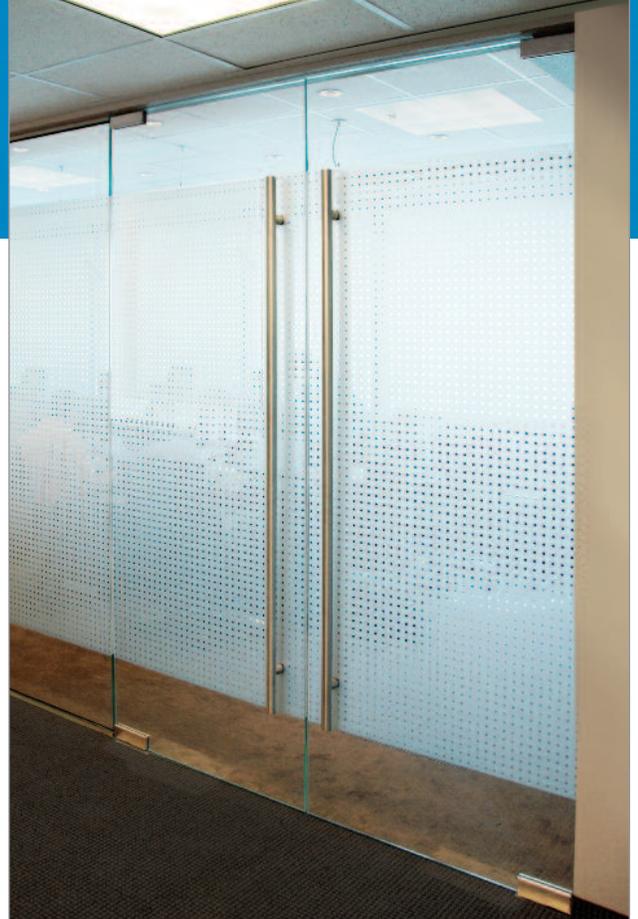

The **NEW CRL Bottom Hydraulic Patch Fittings** are designed to eliminate the need to cut into the floor to install a conventional floor closer. Simply install by anchoring the base plate to the substrate. These double-acting Patch Fittings can accommodate interior doors up to 220 pounds (100 kg), and feature a self-closing mechanism with adjustable closing and latching speeds. Also available with a 90 degree hold-open function. Glass fabrication is required.

CAT. NO.	DESCRIPTION	FINISH
<b>CRL380BS</b>	No Hold-Open Hydraulic Patch	Brushed Stainless
<b>CRL380PS</b>	No Hold-Open Hydraulic Patch	Polished Stainless
<b>CRL380A</b>	No Hold-Open Hydraulic Patch	Clear Anodized
<b>CRL380MBL</b>	No Hold-Open Hydraulic Patch	Matte Black
<b>CRL380HBS</b>	90 Degree Hold-Open Hydraulic Patch	Brushed Stainless
<b>CRL380HPS</b>	90 Degree Hold-Open Hydraulic Patch	Polished Stainless
<b>CRL380HA</b>	90 Degree Hold-Open Hydraulic Patch	Clear Anodized
<b>CRL380HMBL</b>	90 Degree Hold-Open Hydraulic Patch	Matte Black

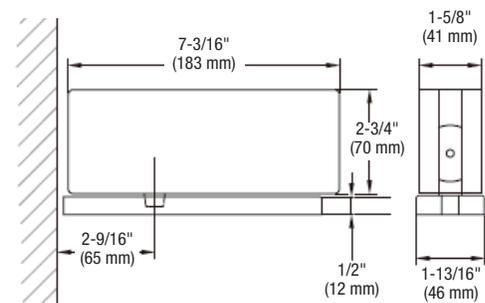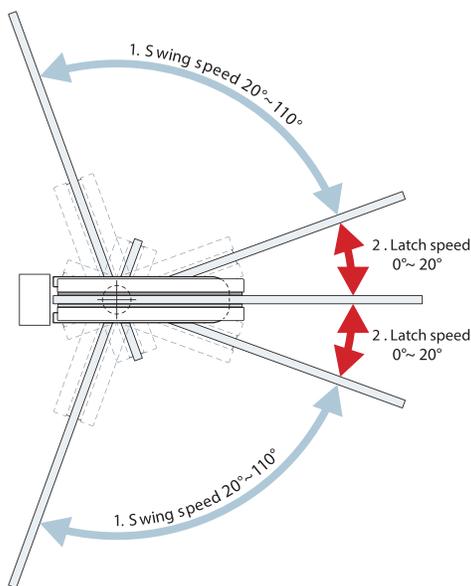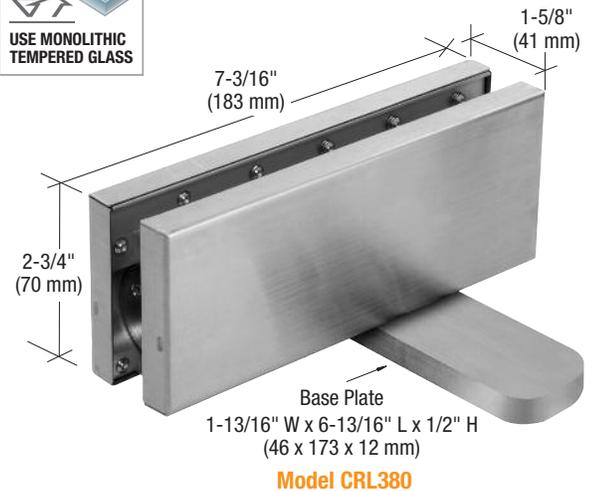

**C.R. LAURENCE COMPANY**

Worldwide Manufacturer and Supplier

Glazing, Architectural, Railing, Construction, Industrial, and Automotive Supplies

Phone: (800) 421-6144 Ext. 7700

Fax: (800) 587-7501

Email: [architectural@crlaurence.com](mailto:architectural@crlaurence.com)

[crlaurence.com](http://crlaurence.com)

[usalum.com](http://usalum.com)

[crl-arch.com](http://crl-arch.com)