

## Custom Platinum Series Door Quote/Order Request Form

### Page 1 of 2

Fax Completed Checklist to U.S. Aluminum Technical Sales at (866) 262-3299. Then call to discuss: (800) 262-5151 (U.S.), (877) 421-6144 (Canada), or (323) 588-1281 (International). Ask for Extension 5305. This form is also available online at [usalum.com](http://usalum.com).

Company Name \_\_\_\_\_  
 Contact \_\_\_\_\_  
 Job Name \_\_\_\_\_

Phone # \_\_\_\_\_  
 Fax # \_\_\_\_\_  
 Date \_\_\_\_\_

When you are ready to order, utilize this form to assist you in covering the details required to complete a Custom Door Entrance installation. Going through this exercise should prevent you from overlooking any details related to your installation.

**IMPORTANT:** Depending on the complexity of your project, one or more of the following may be required to accurately order: sketches or drawings of your particular application with dimensions; printed architectural drawings or CAD files; photos of job site conditions (digital images are preferable). **NOTE:** A final sign off is required prior to any custom fabrication.

#### DOOR STILE

- Series FFN1, Narrow
- Series FFM1, Medium
- Series FFW1, Wide

#### DOOR FINISH (GLAD)

- Brushed Stainless
- Polished Stainless
- Polished Brass
- Satin Brass
- Satin Anodized
- Dark Bronze Anodized
- Oil Rubbed Bronze
- Custom


#### DOOR OPENING SIZE

- 36" x 84" (914 x 2134 mm)
- 72" x 84" (1829 x 2134 mm)
- Custom

#### DOOR SWING

- |  |            |
|--|------------|
|  | <b>QTY</b> |
| <input type="checkbox"/> LH Hinge Left Swing In        | _____ ea.  |
| <input type="checkbox"/> RH Hinge Right Swing In       | _____ ea.  |
| <input type="checkbox"/> LHR Hinge Left Swing Out      | _____ ea.  |
| <input type="checkbox"/> RHR Hinge Right Swing Out     | _____ ea.  |
| <input type="checkbox"/> LHD Hinge Left Double Acting  | _____ ea.  |
| <input type="checkbox"/> RHD Hinge Right Double Acting | _____ ea.  |
| <input type="checkbox"/> PAIR Swing In                 | _____ ea.  |
| <input type="checkbox"/> PAIR Swing Out                | _____ ea.  |
| <input type="checkbox"/> PAIR Double Acting            | _____ ea.  |

#### DOOR SWING CHART

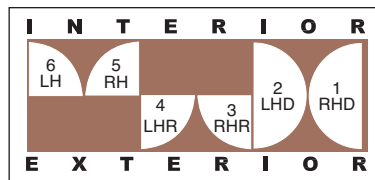

Use the Door Swing Chart to determine how the door(s) should be handed.

#### DOOR GLASS

- 1/4" (6 mm)
- 3/8" (10 mm)
- 1/2" (12 mm)
- 9/16" (14 mm)
- 3/4" (19 mm)
- 1" (25 mm)
- Other (Specify) \_\_\_\_\_

- Tempered
- Laminated
- Insulating
- Color (Specify) \_\_\_\_\_

#### TOP RAIL

- 3-1/16" (78 mm) Rail
- 4" (102 mm) Rail
- 5" (127 mm) Rail
- 10" (254 mm) Rail
- Custom

#### FRAME SYSTEM

- |                           |                                  |                                     |
|---------------------------|----------------------------------|-------------------------------------|
| <b>Series 400</b>         | <input type="checkbox"/> Tubular | <input type="checkbox"/> Open Back  |
| <b>Series 450</b>         | <input type="checkbox"/> Tubular | <input type="checkbox"/> Open Back  |
| <b>Series 451</b>         | <input type="checkbox"/> Tubular | <input type="checkbox"/> Open Back  |
| <b>4-1/2" Flush Front</b> | <input type="checkbox"/> FF450   | <input type="checkbox"/> FF451      |
| <b>6" Flush Front</b>     | <input type="checkbox"/> FF600   | <input type="checkbox"/> FF601      |
| <b>Durafront</b>          | <input type="checkbox"/> 450     | <input type="checkbox"/> 451        |
| <b>Subframe</b>           | <input type="checkbox"/> TJ450   | <input type="checkbox"/> TJ455 (DF) |

#### FRAME TYPE

- Up and Over (No Transom)
- 126" (3.2 m) High With Transom
- Frame Only
- Door Only (No Frame)
- Custom

#### BOTTOM RAIL

- 4" (102 mm) Rail
- 5" (127 mm) Rail
- A.D.A. 10" (254 mm) Rail
- Custom

## Custom Platinum Series Door Quote/Order Request Form

Page 2 of 2

### PUSH/PULL HARDWARE

- Standard Push Bars
- Standard Push/Pull
- Offset Pulls
- None (Supplied by Others)

### DOOR HINGING

- Top/Bottom Offset Pivots
- 1 Pair Butt Hinges
- Center Pivot (Double Acting)
- Continuous Gearing Hinge
- Intermediate Pivots  
Add \_\_\_\_\_ per Door
- Intermediate Butt Hinges  
Add \_\_\_\_\_ per Door

### PANIC DEVICES

- Rim Panic With Crashbar
- Concealed Panic With Crashbar
- Mid-Panel Device
- Rim Panic With Push Pad
- Concealed Panic With Push Pad
- CRL-Blumcraft Panic
- Removable Mullion
- Custom

### DOOR HARDWARE FINISH

- Brushed Stainless
- Polished Stainless
- Polished Brass
- Satin Anodized
- Dark Bronze Anodized
- Other (Specify) \_\_\_\_\_

### THRESHOLD

- None (Leave 1/2" [12.7 mm] Allowance)
- None (No Allowance)
- 4" (101.6 mm)
- 4-3/4" (120.7 mm)
- 5" (127 mm)
- 7" (178 mm)
- Custom

### DOOR SWEEP

- Yes  No
- Exposed Fasteners
- Concealed Fasteners

### DOOR CLOSER

- O.H. Concealed (Double Acting)
- O.H. Concealed (Offset)
- 90°
- 105°  
Hold Open  Yes  No
- Surface Mount
- Drop Plate
- Door Stop/Holder
- No Closer Required

### LOCKING OPTIONS

- MS Deadbolt With Two Cylinders
- Thumbturn in Lieu of Cylinder
- 3-Point Locking @ Pair
- Lock Indicator
- Cylinder Guard
- Flushbolts
- A.R. Latch/Deadlock
- A.R. Hook Throw Deadlock
- Paddle Handle
- A.R. Lever Handle
- CRL Lever Handle
- Electric Strike
- No Locking Hardware

### LAYOUT GRID TO SKETCH DESIGN