




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

Specifications:

Material: Solid Brass
Glass Thickness: 3/8" (10mm) to 1/2" (12mm)
Hole Size Required: 3/4" (19mm)
Includes: Mounting screws and gaskets

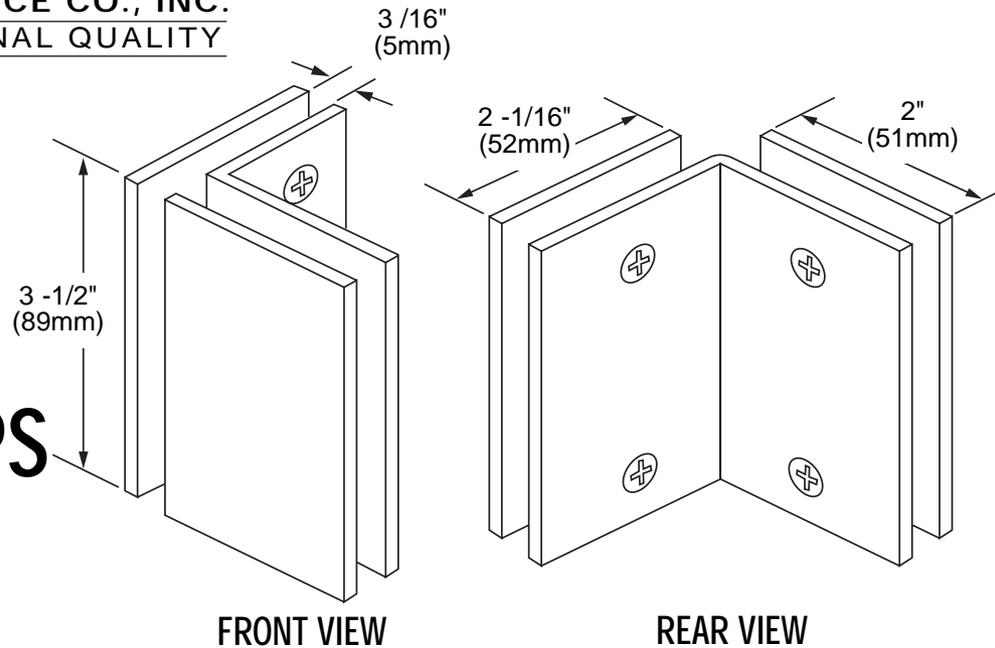


GLASS CLAMPS

Geneva, Concord and
Cardiff Glass Bracket

CAT No. GE090

Template Shown on Next Page

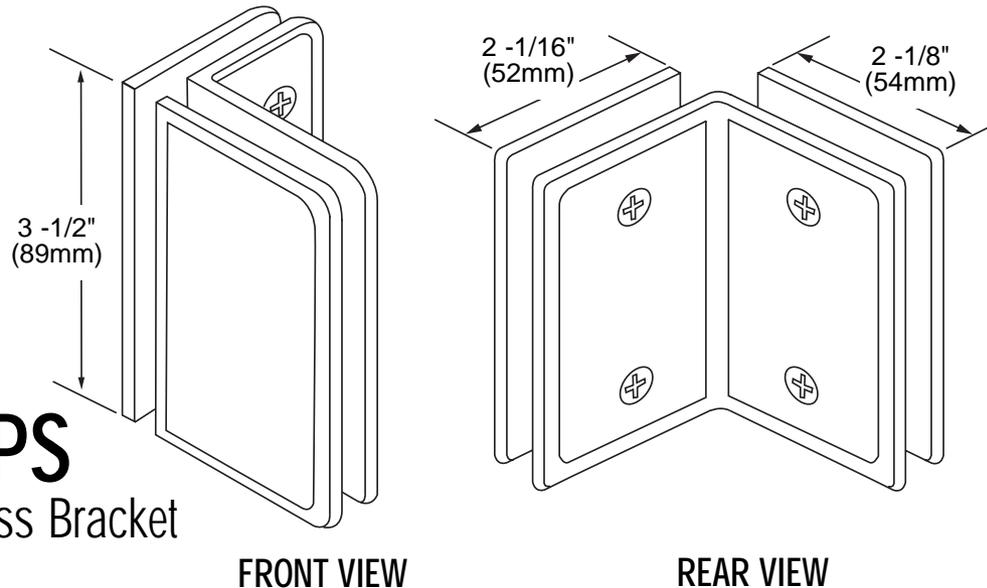

GLASS CLAMPS

Pinnacle and Prima Glass Bracket

CAT No. P1090

Specifications:


Material: Solid Brass
Glass Thickness: 3/8" (10mm) to 1/2" (12mm)
Hole Size Required: 3/4" (19mm)
Includes: Mounting screws and gaskets

Template Shown on Next Page




TYPICAL INSTALLATION


Important:
Project measurements from the edge of the glass.

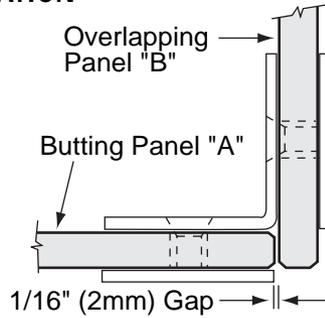

TEMPLATE OPTION FOR SQUARE CUT GLASS

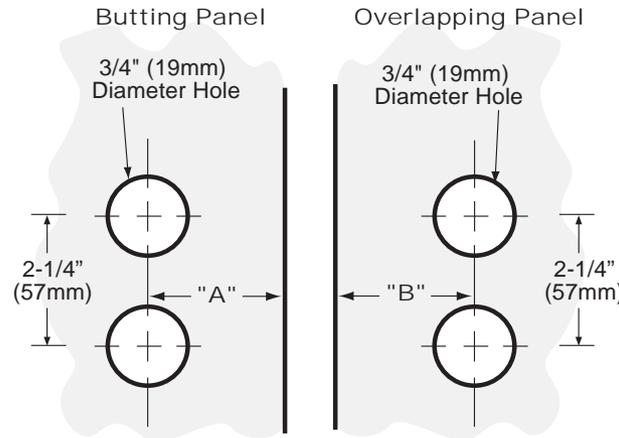

Glass Thickness	"A" Measurement	"B" Measurement
3/8" (10mm)	1-3/8" (35mm)	1-13/16" (46mm)
1/2" (12mm)	1-3/8" (35mm)	1-15/16" (49mm)

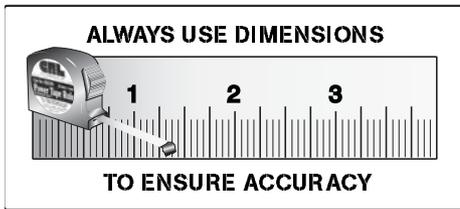

GLASS CLAMPS

THE ABOVE TEMPLATE OPTIONS APPLY

TO THE FOLLOWING CLAMPS:

90° Glass Bracket

CAT. No. GE090

Geneva, Concord and Cardiff Glass Bracket

90° Glass Bracket


CAT. No. P1090

Pinnacle and Prima

Glass Bracket

TYPICAL INSTALLATION

Important:
Project measurements from the outside of the mitered glass.

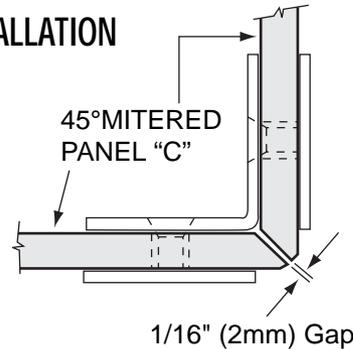

Glass Thickness	"C" Measurement
3/8" (10mm)	1-3/4" (44mm)
1/2" (12mm)	1-7/8" (47mm)

*From outside edge of miter

TEMPLATE OPTION FOR 45° MITERED GLASS

